


2 SB 3000 (2V 3000Ah)




Outer Dimensions (mm)

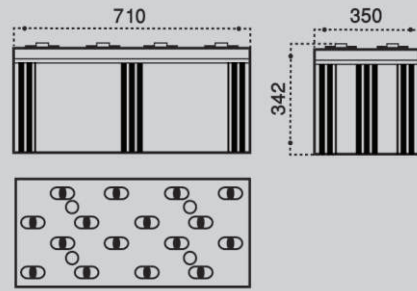

Specifications

Nominal Voltage		2 V
Rated Capacity (10 Hour Rate)		3000 Ah
Dimensions	Total Height	382 mm
	Height	342 mm
	Length	710 mm
	Width	350 mm
Weight Approx (±2.5%)		195 Kg


Terminal Type (mm)



Characteristics

Capacity 25°C (77°F)	10 hour-rate 3 hour-rate 1 hour-rate	3000 Ah 2307 Ah 1650 Ah
Internal Resistance	Full Charge Battery at 25°C (77°F)	0.1 mΩ
Capacity Affected by Temperature (10 Hour Rate)	35°C 25°C 0°C -10°C	3180 Ah 3000 Ah 2550 Ah 2250 Ah
Self-Discharge at 25°C (77°F)	Capacity After The 3 Month of Storage Capacity After The 6 Month of Storage Capacity After The 12 Month of Storage	91 % 82 % 64 %
Charge Constant Voltage	Cycle	Voltage 2.40-2.45 / Cell
	Float	Voltage 2.23-2.25 / Cell

Discharge Curves 25°C (77°F)

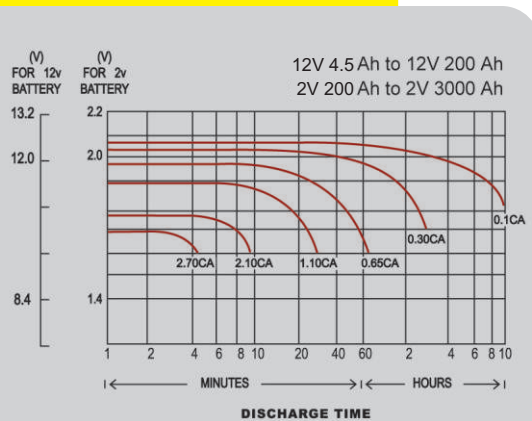

Discharge and Final Voltage Table According to IEC60896-21 Standard

Discharge time	0.25 h	1 h	3 h	5 h	8 h	10 h
Final voltage	1.60 VPC	1.60 VPC	1.70 VPC	1.73 VPC	1.75 VPC	1.80 VPC

Constant Current Discharge Table at 25°C (77°F) Based on IEC60896-21 Standard

Amount of Current (A)	Discharge Time							
	30 m	1 h	2 h	3 h	5 h	8 h	10 h	20 h
	2757	1780	1116	800	552	379	300	158

Constant Current Discharge Table at 25°C (77°F) Based on Final Voltage 1.80 V/Cell

Amount of Current (A)	Discharge Time							
	30 m	1 h	2 h	3 h	5 h	8 h	10 h	20 h
	2550	1650	1034	769	535	358	300	165